


Technical Data		
Type & Composition	P. P. S.	PVC Laminated Floor Covering
Application		Commercial, Residential
Surface Treatment		PU & Anti Bacterial, per design
Profile		Beveled / Non-Beveled, per design
Tile Size (mm)	EN427	470x470, 184x950, 176x940
Total Thickness (mm)	EN428	3.0, 5.0
Wear Layer Thickness (mm)	EN429	0.3 0.5
Classification	EN685	33/42
Fire Rating	EN13501-1	Bfi -S1
	ASTME648	Class 1
	ASTME84	75 or Less
	Mekel Burner Test	Pass
Heat Stability	KSM3802	0.3mm / 0.01" (80°C +2°C, 6hr/hr)
Dimensional Stability	Length: -0.04 Width: -0.10	EN 434
Flexibility	No crack was found	EN 435 ASTM F137
Color Fastness	Above 6	ISO 105-B02 ASTM F1514
Abraision Resistance	4.0 (Wear group : P)	EN 660-2
Emission of Formaldehyde	Not detected	EN 717-2
Slip Resistance	Pass   Longitudinal: 0.53 Width: 0.53	EN 13893
Reaction to Fire	Bfl - S1	EN 13501-1
Dynamic Coefficient of Friction	DS   Direction A: 0.50   Direction B: 0.61	ASTM C1028
Resistance to Chemical	Pass	ASTM F925



## Features:

- 4 sided Micro Bevel
- Non-Woven fiberglass layer
- 0.5mm Micro-Ceramic wear layer
- 2 coats UV
- Nano-Silver antibacteria
- No underlay or glue required
- 15 years commercial warranty on manufacturing defect only.
- 25 years residential warranty on manufacturing defect only.

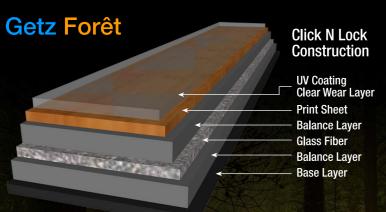

GETZ BROS. & CO. (SINGAPORE), PTE. LTD.
62 Sungei Kadut Loop.
#04-08 (IFC) International Furniture Centre, Singapore 729507
Tel: 65-6897 8588 | Fax: 65-6473 1028 Website: www.getz.com.sg

Experience nature at NOME





# Oret resilient flooring
















With the *Click n' Lock system* you don't need any adhesive, tools or professional installer. It is simple and easy to install.

Getz Forêt Resilient Flooring is designed with Nano-Ceramic protective properties, its tough and resilient enough for todays busy lifestyle and in addition Getz Forêt will last up to 25 years of used.

score (E III) E E





















Note: Photos are for illustrative purposes only, actual product may vary.

### Hot & Cool climate free

Non-shrink design of Glass-fiber layer.

### Easy to install

Just assemble and lock, do it yourself! Save labor and glue cost.

### Anti-water & wet

Wine spills & water cleaning is not a problem.

### Crack-proof

Strong to falling shock of sharp object. Resilient LVT restores its surface.

### Floor heating

High thermal conduction. Provides 50% savings from house warming cost compared to wooden floor.

### Various designs

60 World-class designers' legendary patterns that will surely satisfying your desire for sensuous space.



# Experience nature at NOME